

AD-A280 378



**Quarterly Progress Report #1
(9/9/91 - 12/31/91)**

Sponsored by: Dr. Bertram Hui
DARPA/DSO
3701 N. Fairfax Drive
Arlington, VA 22203
(703) 696-2239

Contractor: MCNC, Center For Microelectronics
Post Office Box 12889
3021 Cornwallis Road
Research Triangle Park, North Carolina, 27709-2889



Effective Date of Contract: 9/9/91

Contract Expiration Date: 3/9/91

Contract Amount: Basic \$1,178,466.00

Principal Investigator: Gary Jones
919-248-1922, FAX 919-248-1415

Title of Work: Field Emitter Array RF Amplifier Development Project
Phase One, Cathode Technology Development
DARPA Contract # 9250004

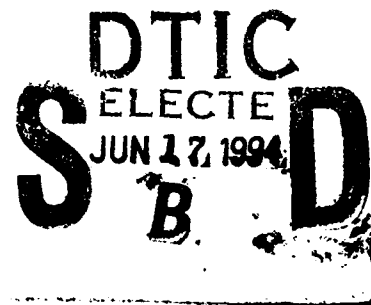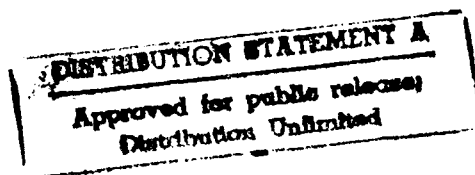

DTIC QUALITY INSPECTED 2

94-18765



94 6 16 051

REPORT DOCUMENTATION PAGE			Form Approved OMB No. 0704-0188	
<small>Public reporting burden for this collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington, VA 22202-4302, and to the Office of Management and Budget, Paperwork Reduction Project (0704-0188), Washington, DC 20503.</small>				
1. AGENCY USE ONLY (Leave blank)	2. REPORT DATE JAN 92	3. REPORT TYPE AND DATES COVERED QUARTERLY, 9/9/91 - 12/31/91		
4. TITLE AND SUBTITLE Quarterly Progress Report #1: 9/9/91 - 12/31/91		5. FUNDING NUMBERS C MDA972-91-C-0028		
6. AUTHOR(S) Dr. Ching-Tzong Sune Gary W. Jones, Principal Investigator				
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) MCNC Electronic Technologies Division Post Office Box 12889 3021 Cornwallis Road Research Triangle Park, North Carolina 27709-2889		8. PERFORMING ORGANIZATION REPORT NUMBER P9250004-Q1		
9. SPONSORING ORGANIZATION NAME(S) AND ADDRESS(ES) ARPA/DOSO 3701 North Fairfax Drive Arlington, Virginia 22203-1714		10. SPONSORING/MONITORING AGENCY REPORT NUMBER		
11. SUPPLEMENTARY NOTES Dr. Sune (919) 248-1975, (919) 248-1455 FAX COTR: Dr. Bertram Hui (703) 696-2239, (703) 696-2201 FAX				
12a. DISTRIBUTION/AVAILABILITY STATEMENT Approved for public release; distribution is unlimited. Defense Technical Information Center Building 5 / Cameron Station Arlington, Virginia 22214			12b. DISTRIBUTION CODE	
13. ABSTRACT (Maximum 200 words) First Quarterly R&D Status / Technical report for the Field Emitter Array RF Amplifier Development Project - Phase I, Cathode Technology Development.				
14. SUBJECT TERMS Field emission, cold cathode, RF amplifier			15. NUMBER OF PAGES 10	
			16. PRICE CODE	
17. SECURITY CLASSIFICATION OF REPORT UNCLASSIFIED	17. SECURITY CLASSIFICATION OF THIS PAGE UNCLASSIFIED	17. SECURITY CLASSIFICATION OF ABSTRACT UNCLASSIFIED	20. LIMITATION OF ABSTRACT	

NSN 7540-01-280-5500

Standard Form 298 (Rev. 2-89)
Prescribed by ANSI Std. Z39-18
298-102

Field Emitter Array RF Amplifier Development Project Phase 1, Cathode Technology Development

1.0 Executive Summary

- MCNC has theoretically determined the vertical column field emitter approach to be superior to its thin film and wedge emitter approaches for high frequency applications.
- Calculations indicate that the device transconductance/capacitance ratio per cell plays the most significant role in high frequency performance of FEA devices.
- Masks have been designed and fabricated for the pointed column device structures. Within the 1 cm² chip area, there are a variety of different size FE arrays, ranging from 1 emitter per cell to over 250,000 emitters per cell. The emitters are arranged in 2D arrays, which are the lowest parasitic capacitance configuration for a point cell array
- A 0.5 micron gate opening mask has been designed and is being fabricated which will provide ~1,000,000 tips in a 4x4 mm array and will provide ~0.25-0.30 micron gate-to-emitter tip spacing on top of the low capacitance columns.
- Low capacitance thin film emitter arrays are being processed for voltage spike protection devices since the small spacings in the thin film devices (potentially 10's of nanometers) will induce breakdown at lower voltages. This could be especially useful in providing safer insertion of point FEAs in high voltage tube systems. We also added points (saw blade design) to some of our thin film designs to allow them to operate at higher transconductances and thereby higher frequencies than straight edge designs.
- Deflection structures and lenses are under consideration for mask set updates.
- Silicon columns up to 10 microns have been successfully produced.
- Silicon column arrays have been coated with thick SiO₂ and planarized to form circular silicon islands in a sea of glass; processing of points on the columns is currently underway.
- Processing has begun on the new mask set, the first test runs are anticipated to be completed during the next quarter.

II. Milestone Status:

Milestones

	Completion Date	
	Original	Actual
1. Theoretical RF analysis of Gated Emitters		
1.1 Down-Select RF FEA Designs	3/92	12/91
1.2 Identify Structure Parameter Targets	3/92	12/91
1.3 Modify Triangular Mesh Program for Gated Field Emitter Tips (Litton)	3/91	11/91
2. Field Emitter Development		
2.1 Design Mask Set/Device Layout	11/91	10/91
2.2 Fabricate Mask Set	12/91	11/91
2.3 Fabricate Basic Gated Point Emitters	12/91	12/91
2.4 Fabricate Column Emitter Structures	10/91	10/91
3. Vacuum Sealing/Testing System Design		
3.1 Design Vacuum Sealing/Test System	11/91	12/91
3.2 Order Vacuum Sealing/Test System	11/91	12/91
3.3 Expected Delivery of Testing System	3/92	4/92

Other milestones are not yet due and completion target dates appear unchanged.

III. Technical Progress:

1. Theoretical RF analysis of gated emitters

1.1 Capacitance for the gated columnar emitter appeared the best of all device types investigated. Figure 1 shows projected relationships between column height, gate dimensions and capacitance.

1.2 Transconductance of pointed column emitters has been identified as a primary development thrust. Cathode/gate resistance, interconnect design, and layout/dielectric capacitance were evaluated to be of minimal importance in the selected MCNC pointed column FEA device for practical designs. An evaluation of point structures by Dr. William Joines indicated that for a minimal overlap gate structure (approximated by a wire) and a column built on a plane, we obtain a best case cutoff frequency of 1.55 GHz per microsiemen. Early simulations of gate and column structures indicate that the current physical target structure should perform within 30% of this f_c per emitter (~1 GHz/Microsiemen) when other parasitic effects are included. This is being evaluated further and should be summarized in the next quarterly report.

2.0 Field Emitter Development

2.1 Masks have been designed and fabricated for the pointed column device structures. Within the 1 cm² chip area, there are a variety of different size FE arrays ranging from 1 emitter per cell to over 250,000 emitters per cell. The emitters are arranged in 2D arrays, which are the lowest parasitic capacitance configuration for a point cell array (a linear FEA configuration has more

Availability Codes	
Dist	Avail and/or Special
A-1	

parasitic capacitance due to requiring the same overlap area per cell and the addition of fringe capacitance). A 0.5 micron gate opening mask is being designed and fabricated which will provide ~1,000,000 tips in a 4x4 mm array and will provide ~0.25-0.30 micron gate-to-emitter tip spacing on top of the low capacitance columns. Some thin film designs were left on the mask set for arcing control devices to potentially protect large point emitter arrays in macro-vacuum tubes.

2.2 Development runs have been processed to better characterize different aspects of the process. Most test runs to date have been made using the old mask set and were used for experimentation with segments of the process. Some major fabrication accomplishments this quarter include:

- Silicon columns up to 10 microns have been successfully produced.
- Silicon column arrays have been coated with thick SiO₂ and planarized to form circular silicon islands in a sea of glass; processing of points on the columns is currently underway.
- Processing has begun on the new mask set, the first test runs are anticipated to be completed during the next quarter.

3.0 Vacuum Sealing/Testing System Design

3.1 An extensive design effort was directed at the vacuum wafer bonder/tester. Following discussion with two vendors, a final selection of a custom vacuum equipment company was made in mid-December. The company chosen was Litco, a small disadvantaged business. The system will have two chambers, one for testing and the other for bonding wafers together to form micro-vacuum cavities. The testing and bonding vacuum chambers will have the capability to evaporate thin films of barium, titanium, and other materials prior to testing or bonding without breaking vacuum. We have identified a simple swing source for large area evaporation of titanium and barium which will fit in our chamber. We have been given an April 1992 completion date by Litco. This will be important in evaluating low work function coatings. A diagram of the basic vacuum system is shown in Figure 2.

4.0 Other Developments

4.1 Duke University's work in modeling the RF characteristics of alternative diode structures has been most helpful as was discussed earlier in this report. This theoretical work will continue through the next quarter and is being dovetailed into the electric field and electron trajectory work at Litton.

4.2 UNC-Charlotte has been designing a vacuum test system for their part of this program. The Electrical Engineering Department at UNC-Charlotte will fund purchase of these parts. This system will be used to evaluate noise on emitter tips produced at MCNC. The system should be running by the end of the next quarter when there are plenty of new columnar emitter devices to evaluate.

4.3 North Carolina State University has been ordering parts to upgrade their electron trajectory system and assisting with modeling theoretical Field Emitter characteristics. Data from portions of this work were used by MCNC to generate some of the projected emission curves shown in Figure 3.

4.4 Litton has been updating their triangular mesh program to work with field emission devices. This work has been progressing rapidly and the program is now being tested with actual device structure parameters. An example of such

a recent plot is shown in Figure 4. This example shows no gate intercept for an experimental gated emitter design. Discussions have been held on how to best test and package FEA devices. Testing should begin at Litton during the next quarter.

IV. Fiscal Status

Fiscal Status will be sent from our contract accounting offices in January, 1992.


V. Problem Areas

The initial 1 GHz objective theoretically appears achievable with our current device design and emitter material selection, however, a potential problem is projected for the long term >10GHz Phase 2 objective unless the surface work function can be greatly reduced without degrading the tip dimensions, capacitance/tip, or other important device parameter. Several low work function materials have been ordered with the target of over 10 microseimens per tip as a long term objective. Alternative beam focusing and deflection based devices not requiring modulation of emission are also currently under early stage review for >>20 GHz applications.

VI. Visits and Technical Presentations

The only presentation made on this project outside the direct program participants during the contract time period has been the DARPA kickoff review. No visitors have come to review this project.

Figure 1
Relationship Between Column Heights and Capacitance

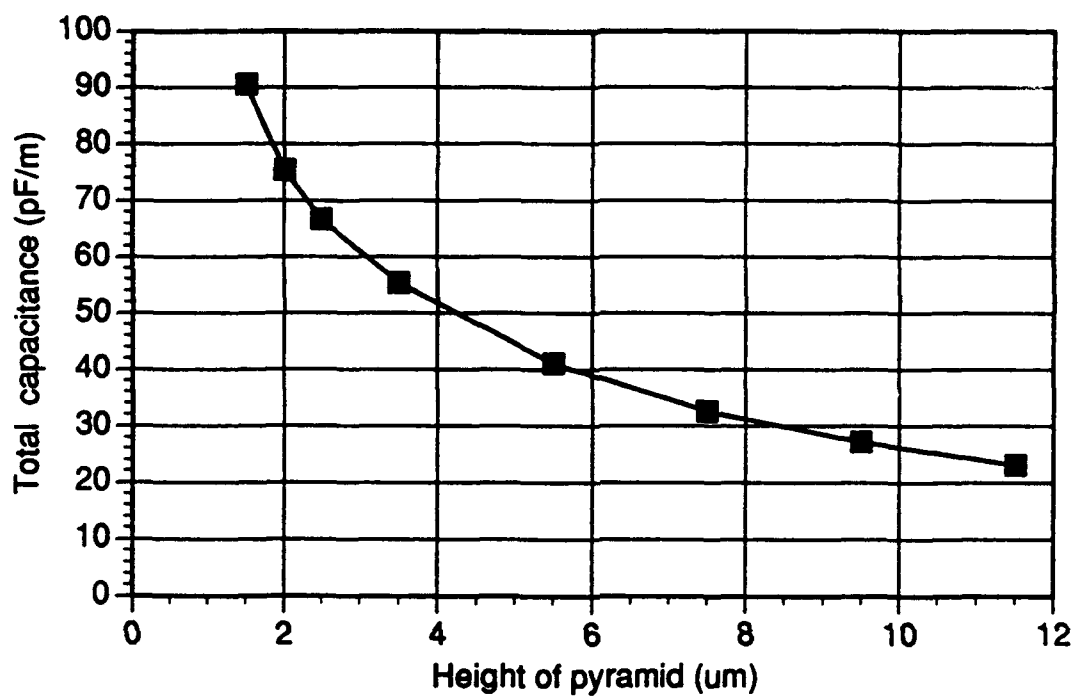

1(a)

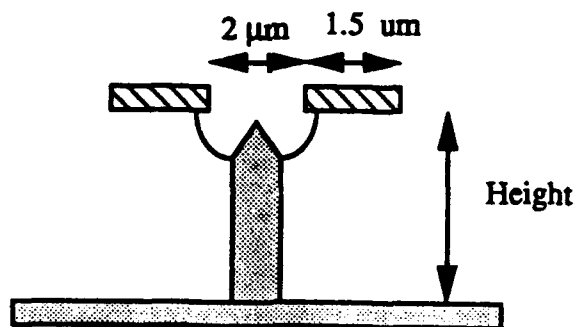


Figure 1 (continued)
Comparison of Capacitance Due To Different Gate Structures

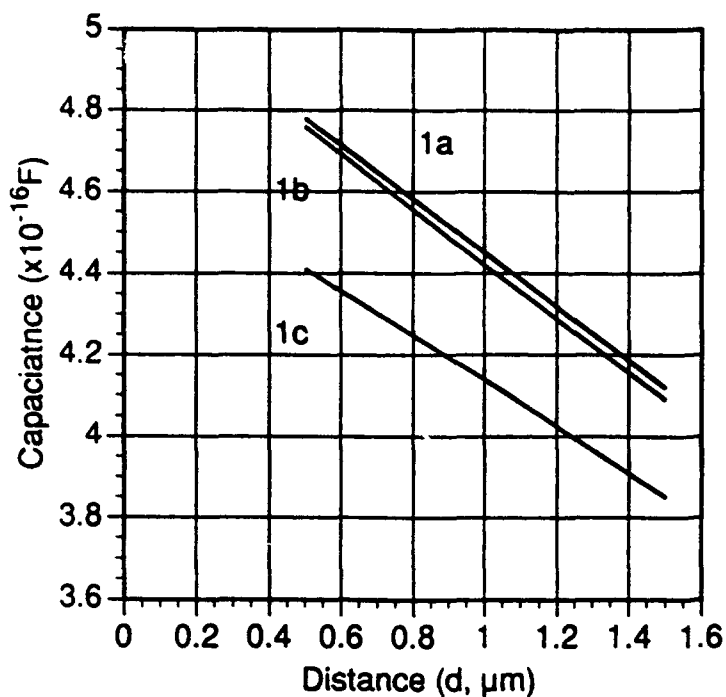


Fig. 1b



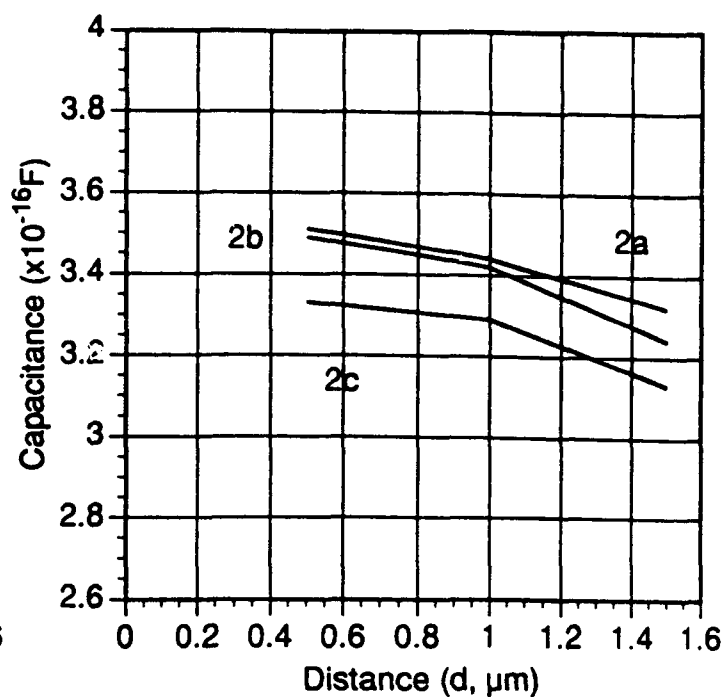


Fig. 1c

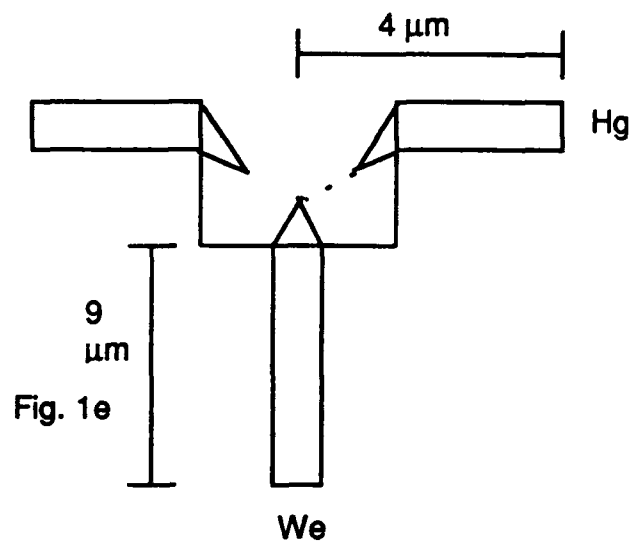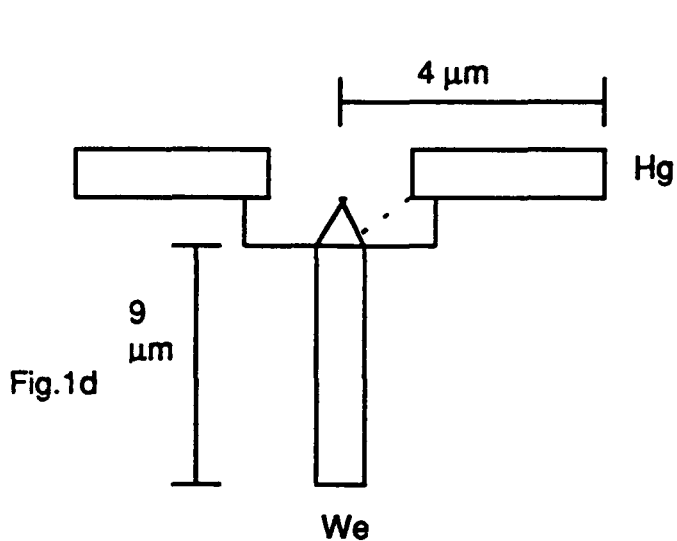

$We = 1.0 \mu\text{m}$	Fig.	Hg (μm)
1a	Fig. 1d	0.5
1b	Fig. 1d	0.1
1c	Fig. 1e	0.5

$We = 0.1 \mu\text{m}$	Fig.	Hg (μm)
2a	Fig. 1d	0.5
2b	Fig. 1d	0.1
2c	Fig. 1e	0.5

Figure 2

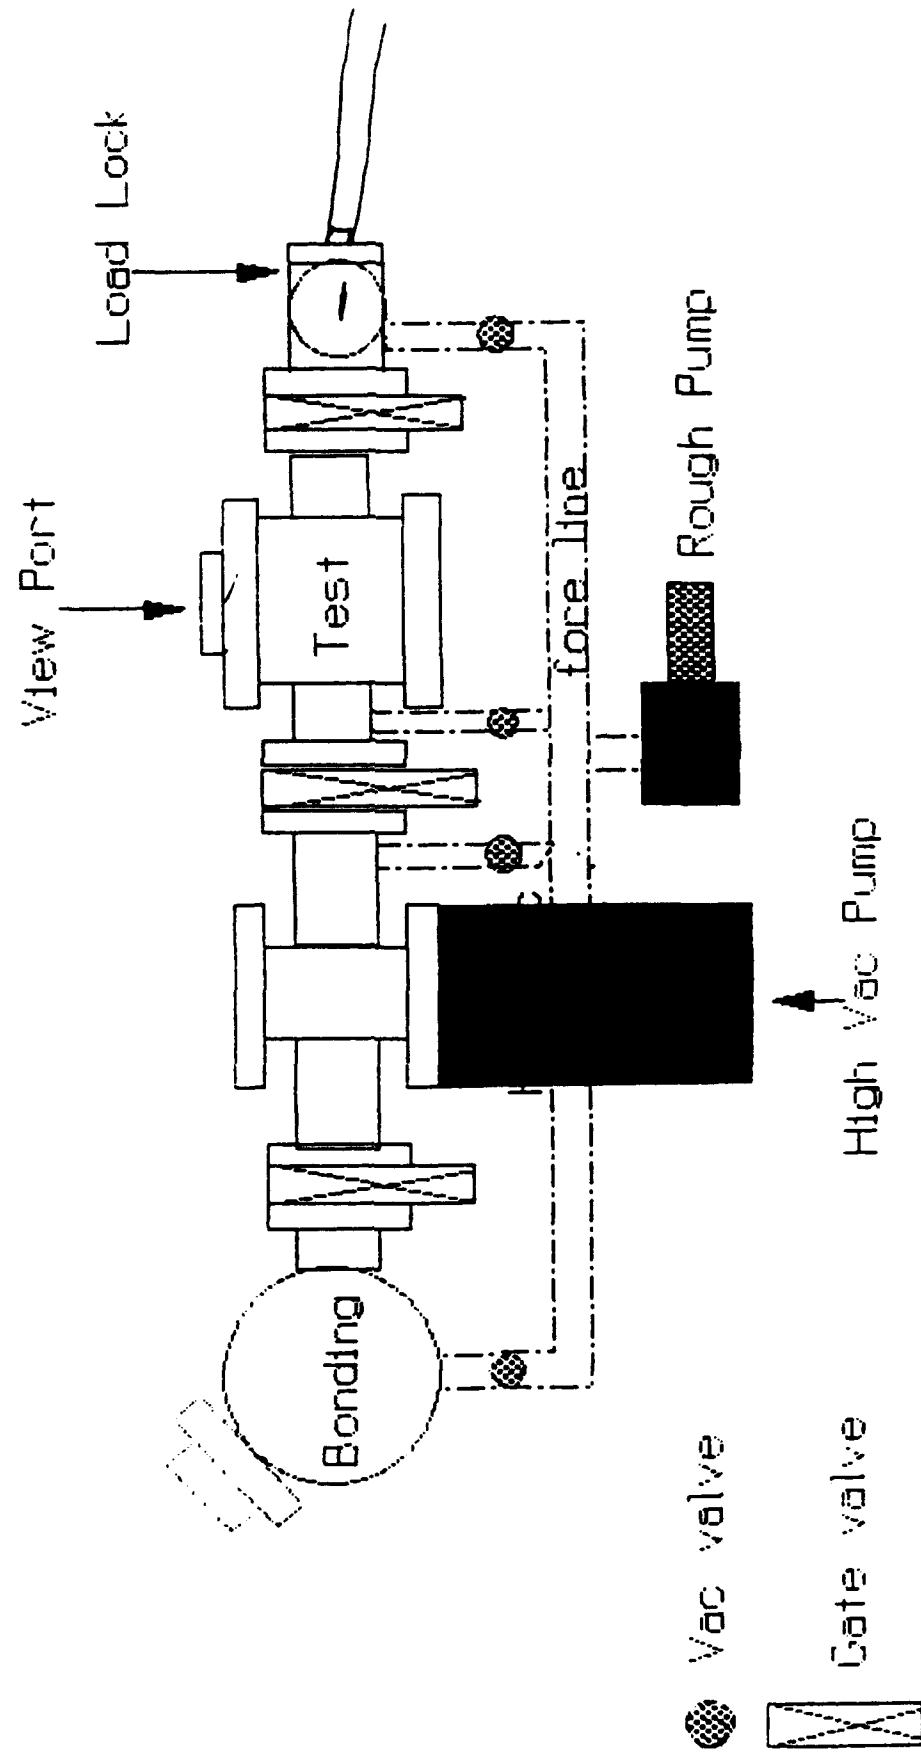


Figure 3
Projected Emission Curves for Different Diameter Gate Openings




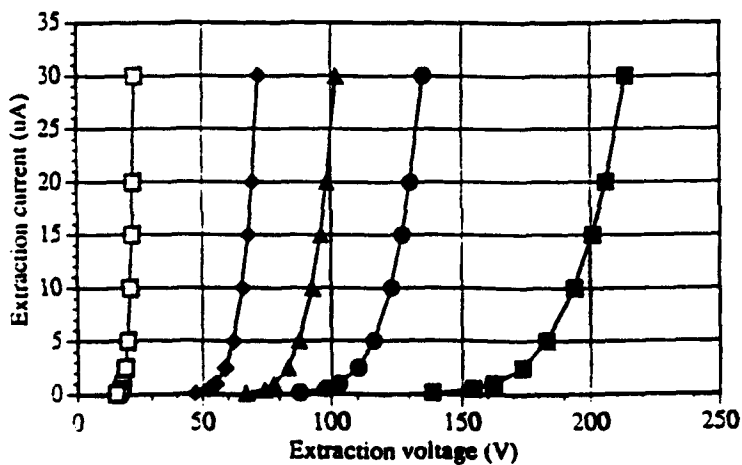


Figure 4

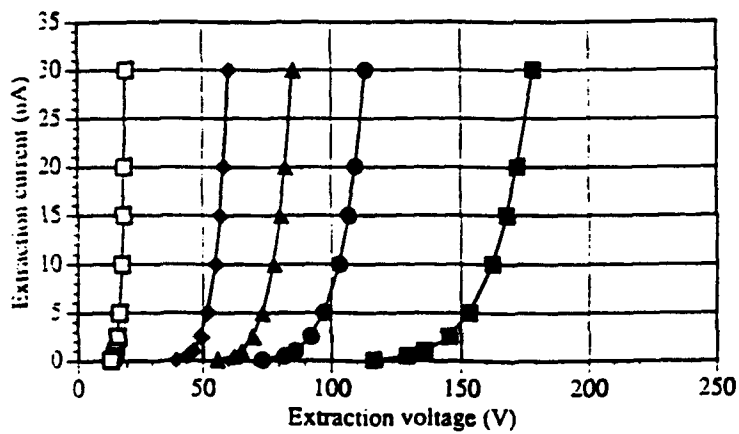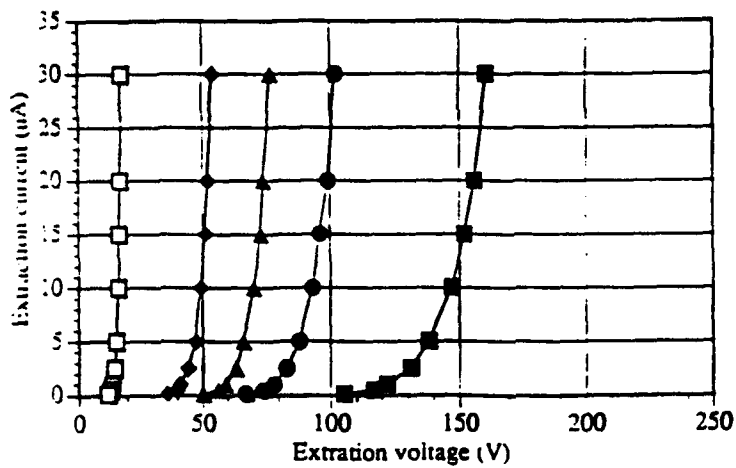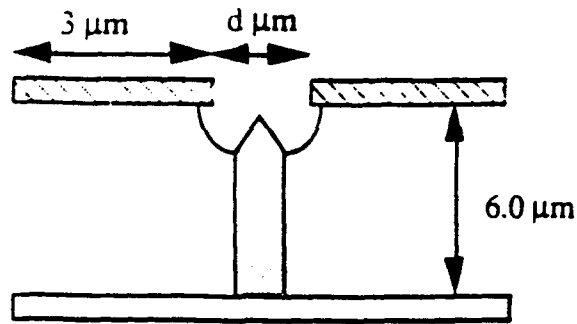